


Excellence in seaming

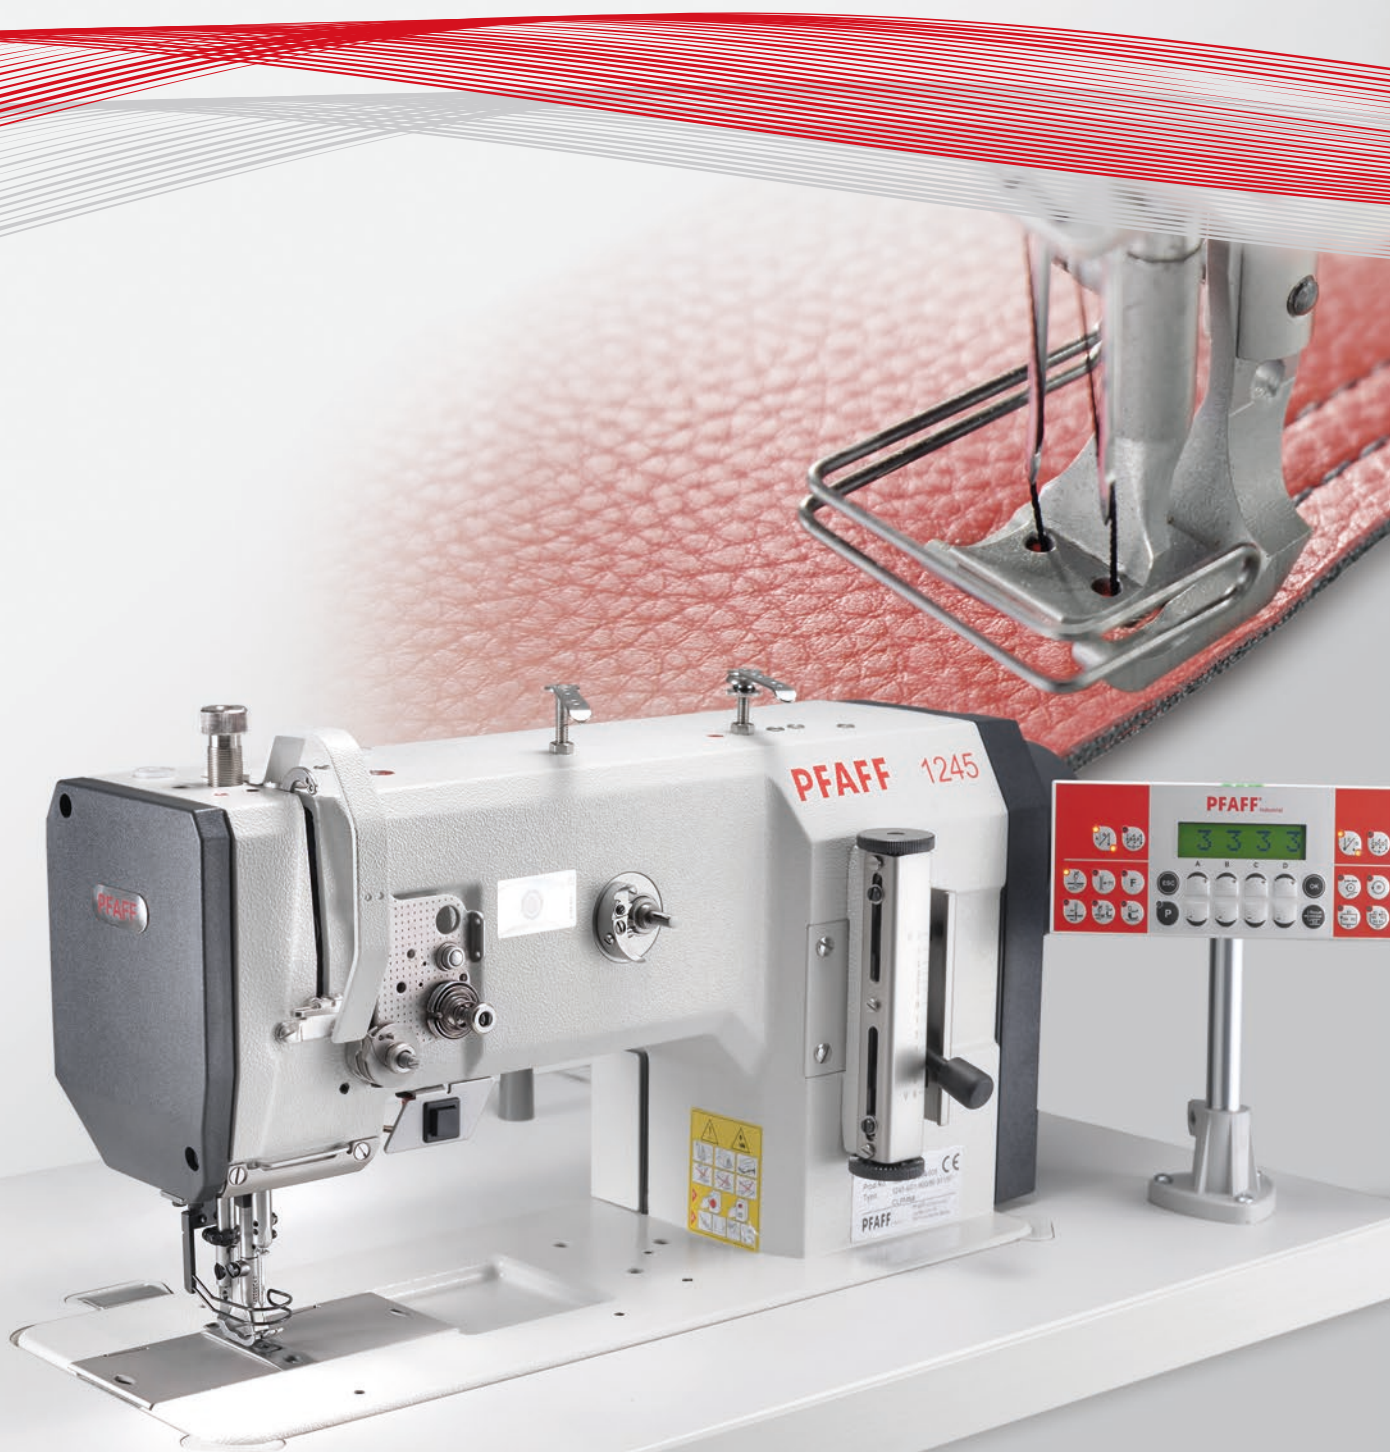

1245/1246

Single- and double needle lockstitch
sewing machine with unison feed

1245 1246

Sewing of medium-heavy materials, e.g. furniture and car upholstery, leather clothing, leather goods, etc.

Features:

- High traction due to unison feed
- Even feed motion without any ply-shift of individual layers
- Large vertical rotary hook with 60% more bobbin thread capacity than other standard-sized hooks (capacity with 40/3 threads: 50 m)
- Automatic hook lubrication
- Efficient hook protection against thread jamming due to standard built-in overload coupling (M)
- Rugged and durable machine construction
- The high top feed lift (7 mm) allows trouble-free sewing of thick materials and an easy sewing over cross seams
- Easy loading and unloading – even of bulky material – due to a high fabric clearance of 14 mm
- Special D-version for processing very thick materials



Versions:

Types	Model									Four-motion drop feed
		-6/01		-17/01		-900/56	-911/97			P
1245	C	●			8,0				-	●
1245	C	●			8,0	●	●	●	-	●
1245*	C			●	8,0				-	
1245	D	●			8,0				-	●
1246**	C		●		6,0				6.4 ; 8.0 ; 10.0 (further on request)	●
1246**	C		●		8,0				6.4 ; 8.0 ; 10.0 (further on request)	●
1246**	C		●		6,0	●	●	●	6.4 ; 10.0 (further on request)	●

Remarks:

Part set - 6/01: for general operations
Part set -17/01: for binding operations

* with part set, without attachment
** also without part set available



Technical data:

Stitch type:

301 (lockstitch)

Max speed:

2,800

Top feed lift:

7 mm

Fabric clearance:

max. 14 mm

Needle system:

134-35

Needle size:

(Nm in 1/100 mm):

110-150

Balance wheel:

80 mm eff. dia

Motor power:

PFAFF P40 CD: 500 W (1245 with -900, -911)

Ho Hsing MJ-1: 600 W (1245 without -900, -911)

Clear work space:

270 x 115 mm

Carton dimensions:

77 x 62 x 38 cm

Bedplate dimensions:

476 x 177 mm

Net weight: (sewing head) approx. 36 kg**Gross weight:**

(sewing head in carton)

approx. 44 kg

**PFAFF Industriesysteme
und Maschinen GmbH**

Hans-Geiger-Str. 12 – IG Nord

D-67661 Kaiserslautern

Telefon: +49-6301/3205-0

Telefax: +49-6301/3205-3171

E-mail: info@pfaff-industrial.com

Website: www.pfaff-industrial.com